

# AR2 SHXMTFF C

## ARTISAN Shower Range Artisan Thermostatic Surface Mounted Bar Shower Valve with Adjustable Riser & Fast Fit Connections



### Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-riden to a maximum of 46°C
- Flow control handle incorporates an eco button to save water, this can be overridden by the user
- Supplied with a wall mount 12 fixing kit for easier retro installation
- Includes 1.5m hose, multi-function rub-clean anti-limescale handset and hose retainer

### Product Certifications:



WRAS Expiry Date : 30/11/2022  
WRAS Cert Number : 1711005



TMV2 Expiry Date : 12/11/2020  
TMV2 Cert Number : BC1638-1115




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Style:	Contemporary
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar with adjustable riser
Shower Head Type:	Adjustable
Valve/Cartridge Type:	Manual
Maximum Hot Water Supply Temperature	60
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems
Working Pressure Range:	Min: 0.1 bar, Max: 5 bar
Connection Inlet:	15mm compression
Connection Outlet:	G 1/2" BSP
Isolation Valve Included:	Yes
Check Valve Included:	No

### Dimensions (measurements in mm)

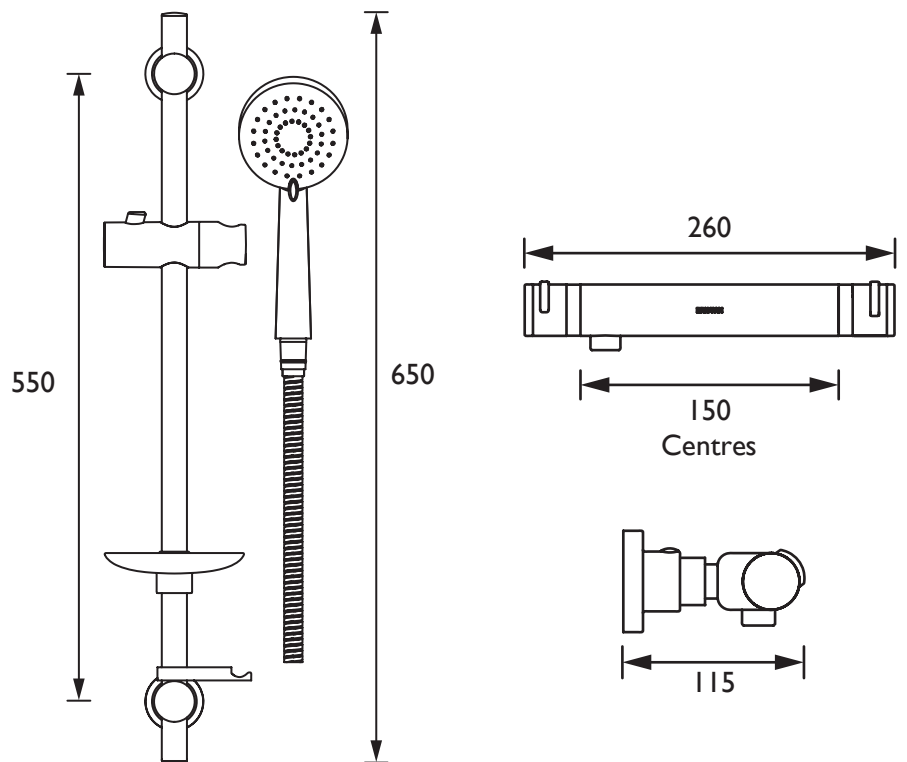

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	3.4	5.5	8.3	12	14	14

## TECHNICAL DATA SHEET



# BRISTAN

TAPS & SHOWERS

D5