

## SELECTRONIC PREMIER PLUS THERMOSTATIC SHOWER


A

Selectronic Premier thermostatic showers offer the highest level of temperature accuracy. PLUS models also feature a longer riser rail with 250Kg\* grab rail duty and a 2-metre shower hose, ideal for specification to assist seated showering in high care applications.



PLUS MODELS FEATURE A GRAB RAIL CARE PACK ACCESSORIES KIT

### Dimensions:

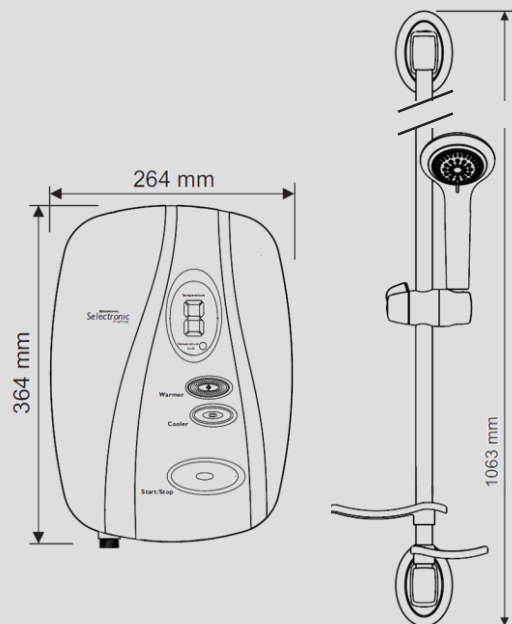

### Key Features

- Accurate, temperature control to within  $\pm 0.5^\circ$  for a comfortable and safe showering experience
- Push button controls with audible adjustment confirmation for ease of operation
- Large LED digital temperature display
- Phased shutdown safety protection for next user cool start up and scale protection
- 3 maximum temperature limiter lock options (40°C), (41°C), (43°C) or unlocked (25 - 46°C) set at installation
- Simple push button rapid commissioning
- Data logger for user and performance analysis
- Right hand side multi-entry connection options
- 5-spray mode shower head with easy rub-clean nozzles
- 250kg\* load bearing grab riser rail with reinforced 4-point fixing brackets (\*subject to correct wall material fixing use)
- 2mtr anti-kink flexible shower hose, adjustable handset clamp, soap dish and shower hose retaining ring.

### Product Range

Item Code:	Model No:	Description	kW
100085	RSELP85P	Selectronic Premier PLUS	8.5
100092	RSELP95P	Selectronic Premier PLUS	9.5
100108	RSELP108P	Selectronic Premier PLUS	10.8


### Technical Details

Model	RSELP85P	RSELP95P	RSELP108P
Item Code	100085	100092	100108
EAN /Bar Code No.	5011139100085	5011139100092	5011139100108
Output (kW)	8.5	9.5	10.8
Current Rating (Amps)	36	40	45
Energy Rating (Class)	A	A	A
Energy Rating (%)	37	37	37
Consumption (kWh/A)	495	488	489
Load Profile	XS	XS	XS
Sound (dB)	15	15	15
Running Pressure psi (bar)	10 (0.7) - 140 (10)	10 (0.7) - 140 (10)	10 (0.7) - 140 (10)
Temp Control Accuracy	$\pm 0.5^\circ\text{C}$	$\pm 0.5^\circ\text{C}$	$\pm 0.5^\circ\text{C}$
Start-up Temperatures	40, 41 or 43°C	40, 41 or 43°C	40, 41 or 43°C
Temperature range	25 - 47°C	25 - 47°C	25 - 47°C
IP Rating	IPX5	IPX5	IPX5
Approvals / Mark	BEAB & CE	BEAB & CE	BEAB & CE
UK Warranty (years)	5*	5*	5*

\*Subject to product registration within 30 days.

## SELECTRONIC PREMIER PLUS THERMOSTATIC SHOWER

### Power and Water Connectivity

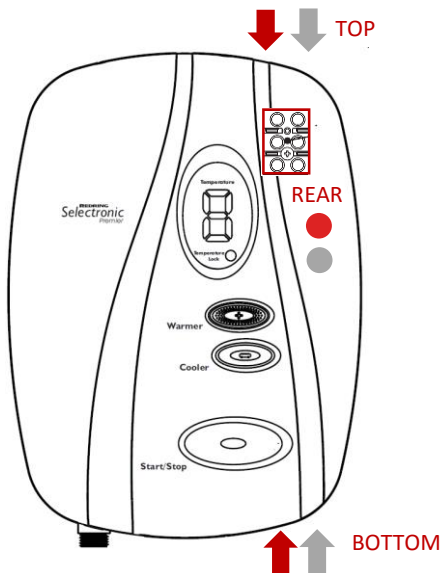

POWER ● → WATER ● →

### Product Packaging Data

Model	RSELP85P / 95P / 108P
Item Code:	100085/092 / 108
Box dimensions (mm)	1005 x 285 x 130
Shower gross weight (Kg)	5.1
Shower unit net weight (Kg)	4.2
Full pallet quantity	30
Showers per layer	3


### Certification

BEAB Approved	YES
BEAB CARE Approved	YES
RNIB Inclusive Design Endorsed	YES
WRAS Approved	YES
CE Marked	YES

### Pack Contents

- 1 x Instant Electric Thermostatic Shower Unit
- Shower accessory kit comprising of:
  - 1 x 1mtr long, 22mm diameter, 250kg\* load bearing grab riser rail with reinforced 4-point fixing brackets
  - 1 x 5 mode easy rub-clean showerhead
  - 1 x 2mtr anti-kink flexible shower hose
  - 1 x Adjustable shower head holder clamp
  - 1 x Soap dish
  - 1 x Shower hose retaining ring
- 1 x Screw and wall plug fixing pack
- 1 x ErP energy rating label
- 1 x Installation and user guide

\*250kg grab duty rail subject wall material strength and the correct wall fixings being used by installer

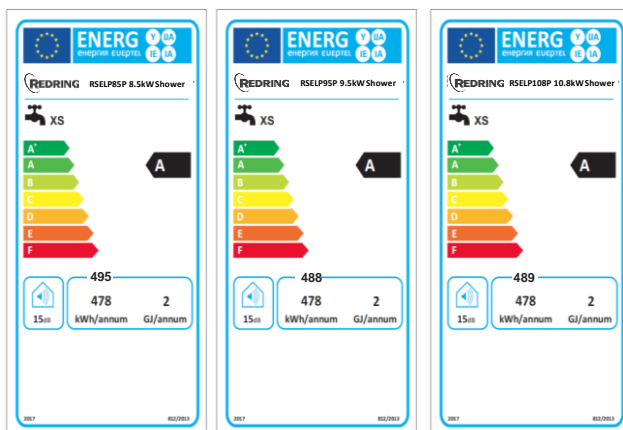

\* Subject to product registration within 30 days.