

1901

Recessed Thermostatic Dual Control Shower Valve with Integral Twin Stopcocks

Product Specification

Product Codes & Finishes: N2 SHC3STP C (Chrome)
N2 SHC3STP G (Vintage Gold)

Product Type: Contemporary

Construction: Body is of brass construction

Supply: Suitable for all plumbing conditions, preferably balanced.

Inlet Connections: 15mm Compression connections


Working Pressures: Min 0.2 Bar, Max 5.0 Bar



Chrome Pictured

Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 9 l/min from stopcock. 12.9l/min from both outlet together
- Fully serviceable from the front

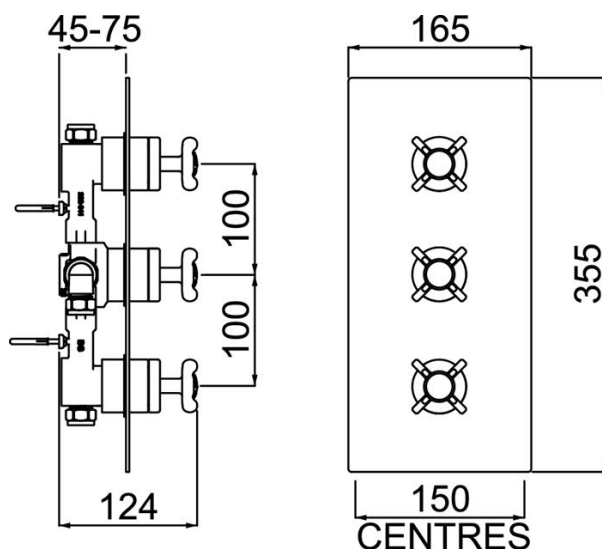

Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
Outlet 1	9.26	14.64	20.7	29.27	35.85	46.29
Outlet 2	9.3	14.71	20.8	29.42	36.03	46.51

Compliance / Approvals

WRAS Approval No: 1407023

Technical Advice: For further information please call 0844 7016273 or email customer@bristan.com

Guarantee: 5 years covering manufacturing faults.

