

PM2 CSHXAR C

PRISM Shower Range Prism Exposed Concentric Chrome Shower Valve with Adjustable Riser Kit



Features:

- 15mm inlet connections
- Easy replacement with adjustable inlets so you can use on existing pipework centres between 136mm and 158mm
- Thermostatic cartridge with preset temperature stop at 42°C
- Supplied with 2 x 8L/min flow regulators
- Includes riser rail with adjustable fixing bracket, multi-function rub-clean anti-limescale handset and hose

Product Certifications:



WRAS Cert. Number: 1805088
WRAS Expiry Date: 31/05/2023




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Exposed Valve
Shower Head Type:	Adjustable
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally balanced
Working Pressure Range:	Min. 0.2 Bar, Max. 5.0 Bar
Connection Inlet:	15mm Inlet Connection
Connection Outlet:	15mm Compression
Isolation Valve Included:	No

Dimensions (measurements in mm)

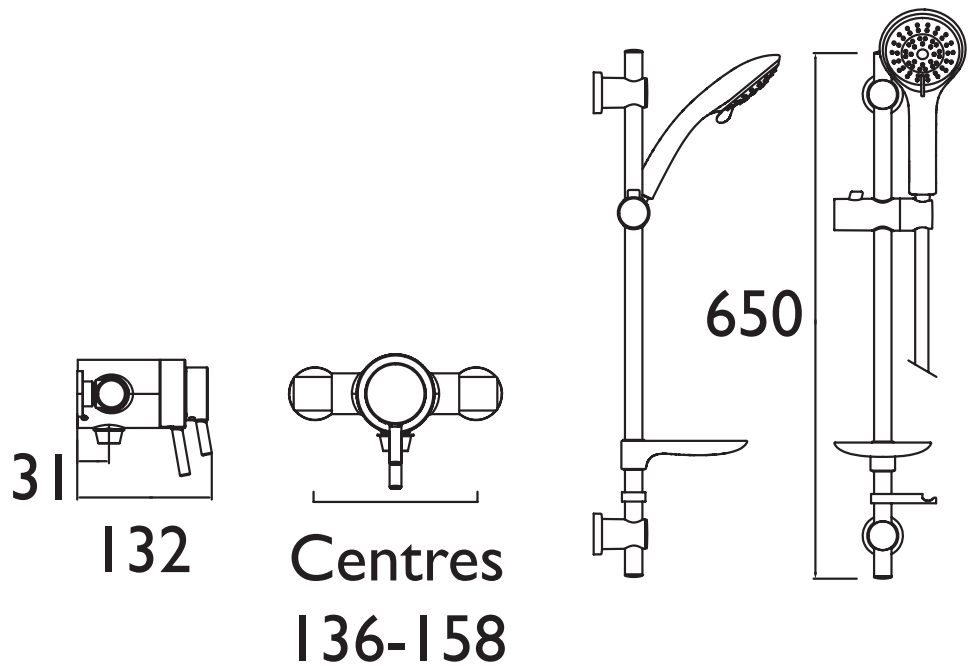

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
With Flow Regulators	--	6.3	9.1	12.9	15.7	20.3
Without Flow Regulators	3.6	6.5	9.6	13.9	17.1	22.1

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D4