

PM SHXMMCTFF C

PRISM Shower Range

Prism Cool Touch Bar Mixer with adjustable riser rail multi mode handset and fast fit wall fixings




Specification

Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar
Shower Head Type:	Adjustable
Valve/Cartridge Type:	Exposed
Maximum Hot Water Supply Temperature	60
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally balanced
Working Pressure Range:	Min. 0.2, Max. 5.0
Connection Inlet:	15mm compression
Connection Outlet:	Open
Isolation Valve Included:	No
Check Valve Included:	No

Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-ridden to a maximum of 46°C
- TMV2 thermostatic control for a higher level of performance and protection
- Unique Safe Touch technology ensures the valves stays cool to the touch while in use
- Dual control - flow and temperature are controlled separately

Dimensions (measurements in mm)

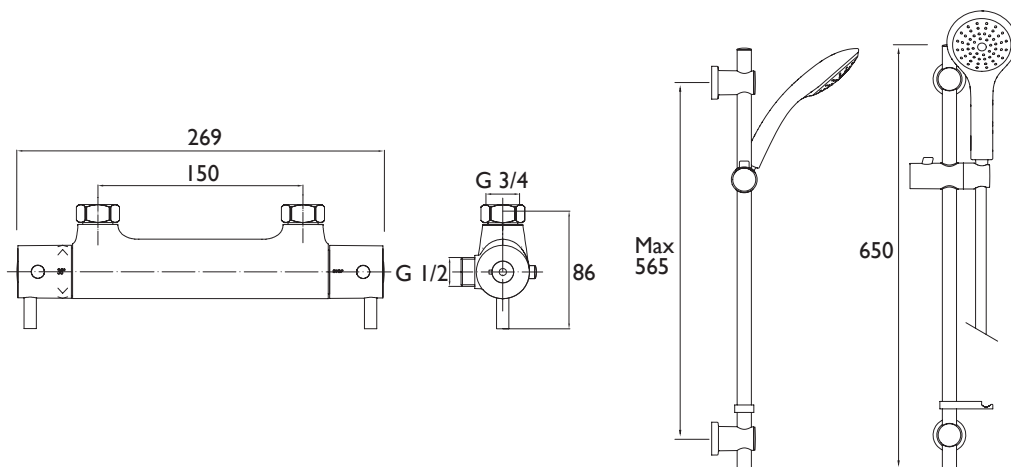

Product Certifications:



For more products, visit our website:
<http://www.bristan.com>



Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Open Outlet	4.2	7.5	11.2	15.8	19.4	25

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D2