

DUL2 SHXARFF C

DU LEVER Shower Range

Design Utility Lever bar mixer with adjustable riser kit and fast fit wall fixings



Features:

- 15mm inlet connections
- Thermostatic cartridge with preset temperature stop at 38°C, can be over-riden to a maximum of 46°C
- Supplied with easy to use lever handles
- Dual control - flow and temperature are controlled separately
- Supplied with a wall mount 12 fixing kit for easier retro installation


Product Certifications:



WRAS Cert. Number: 1409056
WRAS Expiry Date: 30/09/2019




For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Exposed Valve
Shower Head Type:	Adjustable
Valve/Cartridge Type:	Thermostatic
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally Balanced
Working Pressure Range:	Min: 0.2 bar, Max: 5 bar
Connection Inlet:	15mm compression
Connection Outlet:	N/A
Check Valve Included:	No

Dimensions (measurements in mm)

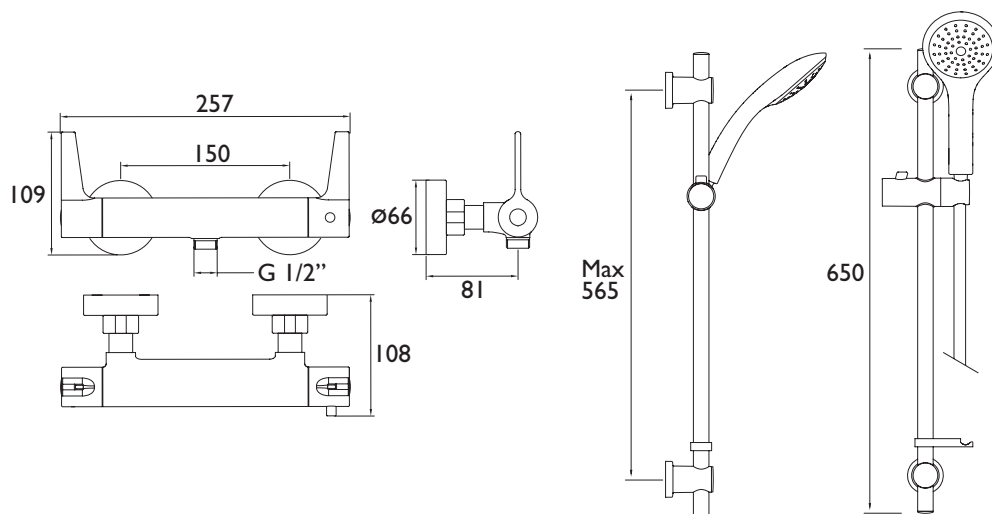

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	5.7	10.1	14.6	20.6	25.3	29.8

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D3