

TFP3003

Commercial Shower Range Fixed Temperature Timed Flow Shower Panel & VR Head



Specification

| | |
|--|-------------------|
| Main Construction Material: | Steel |
| No of Controls: | 2 |
| Shower Type: | Shower Panel |
| Shower Head Type: | Fixed Head |
| Valve/Cartridge Type: | Timed Flow |
| Maximum Hot Water Supply Temperature °C: | 80 |
| Maximum Static Pressure: (bar) | 10 |
| Minimum Dynamic Pressure: (bar) | 0.5 |
| Maximum Dynamic Pressure: (bar) | 5.0 |
| Connection Inlet: | 15mm Copper Tails |
| Isolation Valve Included: | No |
| Check Valve Included: | Yes |

Features:

- Integral thermostatic valve reduces deadleg and risk of legionella
- Water economy push button operation with timed flow
- Vandal resistant showerhead with adjustable spray trajectory
- Fits to ceiling, leaving no exposed pipework
- Automatic thermostatic shutoff in the event of hot or cold water failure

Product Certifications:



WRAS Certificate No.: 2104913
WRAS Expiry Date: 30/04/2026




TMV3 Cert. No.: BC 1577/1015
TMV3 Expiry Date: 01/04/2021

Designations:
High Pressure Shower Economy
Low Pressure Shower Economy



Dimensions (measurements in mm)

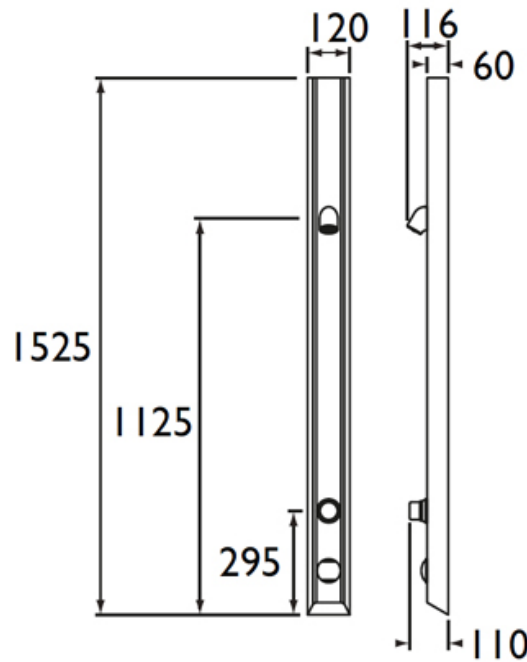

Flow Rates (l/min)

| System Pressure (bar) | 0.5 | 1 | 2 | 3 | 5 |
|-------------------------|-----|---|-----|-----|-----|
| Through Handset (mixed) | 6 | 8 | 8.2 | 8.4 | 8.5 |

TECHNICAL DATA SHEET



BRISTAN

D6