



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added • durability
- Requires minimum operating pressure 0.3 bar


Product Certifications:

For more products, visit our website: http://www.bristan.com



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M28 Flow Straightener			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4" Ceramic Disc Valves			
Plumbing System Requirements:	All, preferably balanced			
Working Pressure Range:	Min: 0.3 bar, Max: 5 bar			
Maximum Hot Water Temperature: °C	65			
Maximum Static Pressure: (bar)	10			
Flow Type:	Single			
Isolation Included:	No			

Dimensions (measurements in mm)

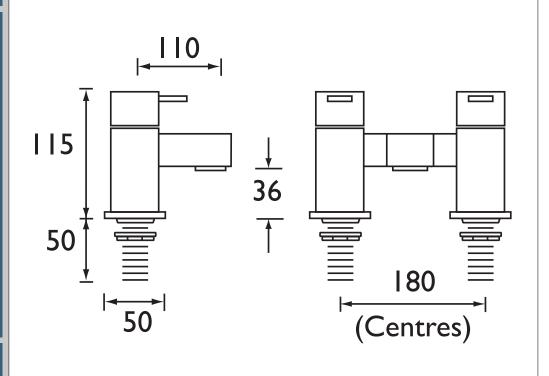

商業	Flow Rates (l/min)							
	System Pressure (bar)	0.3	0.5	1	2	3	5	
	QD BF C	13.9	17.9	25.3	35.8	43.8	56.6	
TECHNICAL DATA SHEET	P QUALITY S YEAR TER ARANTER		B	RIS	ST/	AN showe	RS D5	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.