


Sales Code: HK382

Description: Straight Ladder Rail 1100 X 500mm

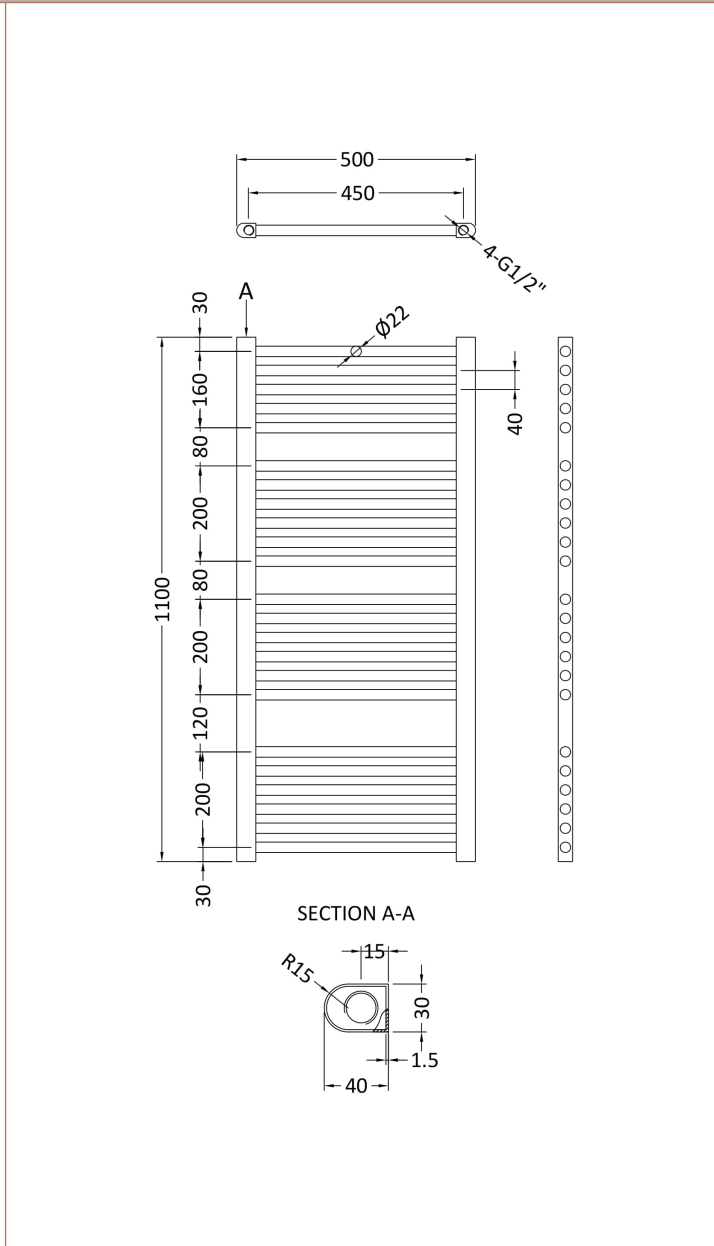

**Product Dimensions**

|                   |      |
|-------------------|------|
| Height (mm):      | 1100 |
| Width (mm):       | 500  |
| Depth (mm):       | 30   |
| Length (mm):      |      |
| Nett Weight (kg): | 7.68 |

**Packaging Dimensions**

|                    |      |
|--------------------|------|
| Height (mm):       | 50   |
| Width (mm):        | 530  |
| Length (mm):       | 1135 |
| Gross Weight (kg): | 8.25 |

**Packaging Data**

|               |                               |
|---------------|-------------------------------|
| Box Colour:   | White Cardboard Shrinkwrapped |
| Box Qty:      | 1                             |
| Label Size:   | 100 x 50                      |
| Label Colour: | White Label                   |
| Label Qty:    | 2                             |

**Outer Box Dimensions (If Applicable)**

|                    |               |
|--------------------|---------------|
| Height (mm):       |               |
| Width (mm):        |               |
| Length (mm):       |               |
| Gross Weight (kg): |               |
| Barcode:           | 5055369003761 |

**Product Details**

|                                     |                |             |             |
|-------------------------------------|----------------|-------------|-------------|
| Country of Origin:                  | Turkey         |             |             |
| Fitting Instruction:                | No             |             |             |
| Certification:                      | CE & UKCA: Yes | RoHS: N/A   | WEEE: N/A   |
| Colour/Finish:                      | Chrome         |             |             |
| RAL No:                             | 7016           |             |             |
| Product Material:                   | Steel          |             |             |
| Heat Element Wattage:               | 250 W          |             |             |
| Heating Element Wattage Compatible: | N/A            |             |             |
| BTU Outputs:                        | 30°C / 563     | 50°C / 1096 | 60°C / 1388 |
| Thermal Outputs: (Watts)            | 30°C / 165     | 50°C / 321  | 60°C / 400  |
| Pipe Centres - If Vertical:         | 455            |             |             |
| Pipe Centres - If Horizontal:       | N/A            |             |             |
| Max Projection:                     | 90mm           |             |             |
| Tube Diameter:                      | 29mm           |             |             |
| Packaging Volume (L):               | N/A            |             |             |
| Wall to Centre of Tappings:         | N/A            |             |             |
| Floor to Centre of Tappings:        | 65             |             |             |
| Dual Fuel:                          | N/A            |             |             |
| IP Rating:                          |                |             |             |