

TG SNK C

TARGET Tap Range Target Monobloc Sink Mixer With Pull Out Spray Chrome



Specification

Product Type:	Kitchen Taps
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Single Lever
Connection Inlet:	1/2" BSP Flexible Tails
Connection Outlet:	Spray Head
Number of Tap Holes:	1
Valve/Cartridge Type:	35mm Cartridge
Plumbing System Requirements:	Suitable for high pressure plumbing systems
Working Pressure Range:	Min 1 bar, Max 8 bar
Maximum Hot Water Temperature: °C	65
Maximum Static Pressure: (bar)	10
Flow Type:	Dual
Isolation Included:	No

Features:

- Long life ceramic cartridge for added durability and ease of use
- Metal fixing nut for added durability
- Pull-out handset with 600mm flexible hose
- Product supplied with two double check valves
- Minimum working pressure of 1.0 bar


Product Certifications:



For more products, visit our website:
<http://www.bristan.com>



Dimensions (measurements in mm)

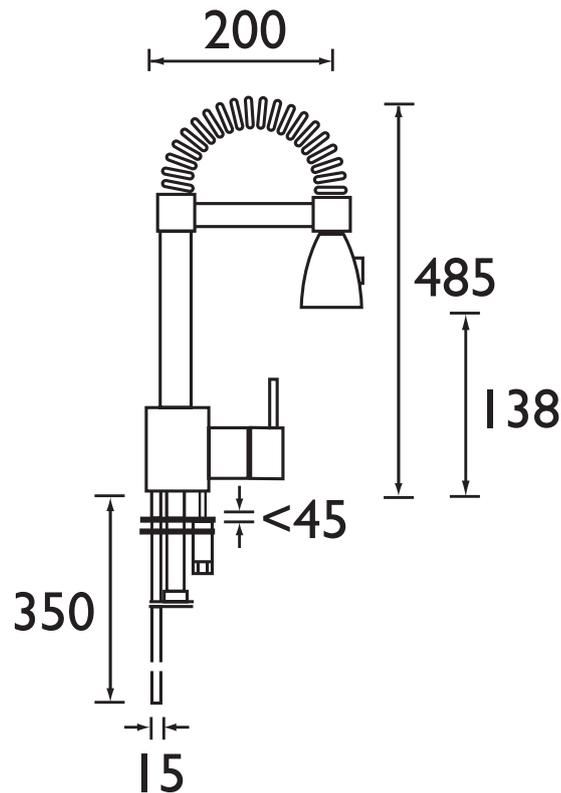

Flow Rates (l/min)

System Pressure (bar)	1	2	3	4	5
TG SNK C	6.1	8.8	10.8	12.5	14

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D6