

SAIL SHWR PK2

SAIL Shower Range Sail Shower Pack 2 Complete



Features:

- Integral two outlet diverter
- 250mm round slimline fixed head with shower arm
- Single function handset and hose with integral handset holder and wall outlet

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass; ABS
No of Controls:	2
Shower Type:	Dual Control
Shower Head Type:	Fixed Head and Handset
Valve/Cartridge Type:	3/4" Ceramic Disc Valve 1/4 turn
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems
Working Pressure Range:	Min: 0.2 bar, Max: 5 bar
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

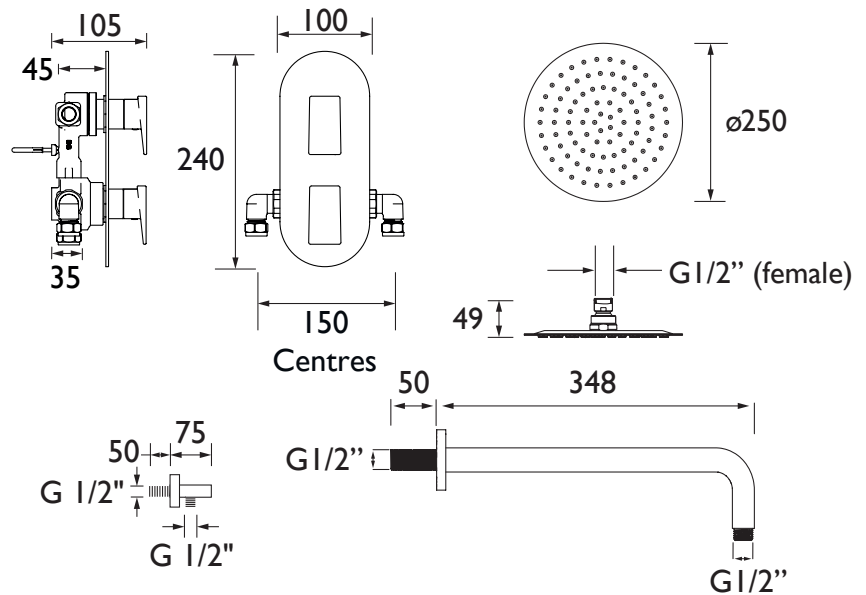

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	8.1	12.8	18.1	25.6	31.35	40.48
Outlet 2	7.91	12.5	17.68	25	30.62	39.53

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D1